

Evaluation of Sewage Wastewater Quality: Physico-Chemical and Microbiological Analysis in Khammam City, Telangana

B.Lalitha Kumari

Department of Botany,
Kakatiya University, Warangal, Telangana, India.
E-Mail: lalitha21prasad@gmail.com

DOI: <https://doi.org/10.63001/tbs.2021.v16.i04.pp307-316>

KEYWORDS

*Physical,
Chemical,
Microbial*

Received on:

30-10-2021

Accepted on:

19-12-2021

Published on:

29-12-2021

Abstract

This study was conducted to findout the physico-chemical and microbiological parameters were analyzed in city waste water of Khammam city Telangana. This water has different pollution parameters i.e., Organic pollutants like dissolved oxygen, bio-chemical oxygen and chemical oxygen demand,Free carbon dioxide, organic matter, In-organic pollutants-electrical conductivity, turbidity, p^H , total alkalinity, chloride, etc.,Temperature range from 23°C to 33°CThe minimum and maximum p^H range from 6.4 to 7.4. The minimum and maximum total alkalinity range from 42 mg/L to 154 mg/L, The minimum and maximum chloride from 136.9 to 278.9 mg/Lwere found. Eutrophic factors like phosphates, nitrates, nitrites were analyzed. The microbiological parameters, total coliform bacteria, fungi, actinomycetes colonies were also analyzed. the effects of disease on a worldwide scale, methodological advancements are required.

Introduction:

The utilized water of the society is called sewage. This utilization may be domestic or industrial. Sewage may generally be caused by domestic waste and industrial waste. Domestic waste water is that which is discharged from residential and commercial establishments. The pollutants in domestic waste water arise from residential and commercial cleaning operations, laundry, food preparation, body cleaning functions and body excretions. The composition of domestic waste water is almost constant. Industrial waste water is discharged from manufacturing plants

where water is used for various processes and also for washing and rinsing of equipment, laboratories, etc. The waste waters coming from industries create undesirable components before they are discharged into water bodies. If the treatment is not done, these wastes pollute water bodies and cause many problems.

Sewage water systems have complicated biological communities of microorganisms. Each degree of water pollution with organic substances corresponds to definite micro flora and micro fauna. Hence a possibility arises to

establish the degree of pollution by the presence of indicator organisms in sewage canals. The presence of such organisms indicates the quality of water or the quantity of microorganisms in the sewage systems. This can be used to establish the degree of its pollution.

Due to scarcity of water, sewage water is being diverted into crop fields, vegetable crops, food crops etc. These are having heavy loads of organic substances, heavy metals, Organic chemicals and xenobiotics in sewage is creating pools and mosquito breeding centers in the outskirts of the city causing a lot of damage to the environment. The entry of toxic pollutants through food chain is biomagnified and resulted in health hazards to human and animals.

In view of these facts about sewage we have undertaken an investigation to analyze and characterize the sewage waters flowing in different canals in and around Khammam city.

Study area:

Khammam city is a historical city situated in-between the altitude of 17° 19' and 18° 36' N and longitude of 78° 48' and 80° 43' E and populated around 8 lakhs do not have any good source of irrigation facility. Maximum temperature is up to 40° C, minimum temperature is 25° C in summer. The east west monsoon in Monsoon season the average rainfall is 870 mm. The common agricultural crops paddy, maize, red gram, green gram and Capsicum etc. These crops are mainly depend for their irrigation on rain water and tanks, hence people are preferring to utilize the sewage waters for their crops without understanding damages to the environment and losses to their soil quality.

Material and methods:

Sewage waste water samples were collected in day time, one time in a season selected sampling sites in three seasons [Monsoon-August, Winter-December, Summer-April] waste water not available in May and June months. The sewage water samples were collected in 9.00 a.m. to 4.00 pm. Four sewage water samples were collected from various parts of the city i.e.

Site 1: sewage water collected from near Railway track.

Site 2: sewage water collected from near grain market.

Site 3: sewage water collected from near main highway.

Site 4: sewage water collected from fruit market.

Sewage water collected in clean 2 liters capacity plastic containers are taken to laboratory for analysis. All chemicals are analytical grade; chemicals were prepared with double distilled water. Physical characters such as temperature, color, odour and p^H were analyzed on the spot. The remaining characteristics such as electrical conductivity, turbidity, and total dissolved solids were analyzed. The chemical characteristics are total alkalinity, free carbon dioxide, chlorides, dissolved oxygen (sewage and distilled water in 1:10), Chemical oxygen demand, biological oxygen demand and percentage of organic matter, nitrates, nitrites, ammonia and phosphates were analyzed as standard procedure suggested by APHA, AWWA, WPCF, (1998).

Results and discussion:

The analysis of various physical characteristics of four sewage water

samples are present in table-1. It is clear that the color of the sewage water changed with season and site, it changed from brown to black with changed densities of sewage constituents. Generally the sewage water collected near Site 1 showed deep black color in majority of the months. The temperature is basically important for its effects on the chemistry and biological reactions in the organisms in water. The temperature variation was from 28° C to 33° C. The capacity of the substance or a solution to conduct an electrical flow is the conductivity. The electrical conductivity ranged from 0.032 µmho to 0.168 µmho, during the present observation. The total

dissolved solids were high in the month of December. In sewage water near Site 1 and the range varied from 2.50 mg/lit in all other sewage canals water under study. Turbidity in water is caused by the substances a particle size of less than 10⁻⁹. While the turbidity was 0.11 N.T.U to 0.35 N.T.U. in different sewage canals in different seasons. The odor of the sewage water has unacceptable majority of the months. Similar here studies Manian *et al* (1991), investigation the self-purification status of sewage water of Aligarh noted certain interesting and important physical attributes.

TABLE 1
PHYSICAL CHARACTERISTICS OF SEWAGE WASTE WATER IN KHAMMAM CITY

S.No	CHARACTERISTICS	SEASON	SITE1	SITE2	SITE3	SITE4
1	Temperature °C	Monsoon	23	23	24	25
		Winter	27	27	27	28
		Summer	31	32	33	33
2	Electrical conductivity (µmho)	Monsoon	0.089	0.098	0.072	0.172
		Winter	0.64	0.112	0.168	0.152
		Summer	0.042	0.032	0.048	0.058
3	Total Dissolved Solids (mg/L)	Monsoon	3	5	6	5
		Winter	5	7	8	9
		Summer	5	12	10	12
4	Turbidity (N.T.U)	Monsoon	0.22	0.26	0.28	0.35
		Winter	0.11	0.16	0.14	0.28
		Summer	0.11	0.14	0.16	0.28

Temperature °C degree centigrade, N.T.U –Nephelo Turbidity Units
µmho- millimhoes, mg/L-milli gram/Litre.

Site 1. Sewage canal at railway track.
Site 2. Sewage canal at grain market.
Site 3. Sewage canal at main highway.
Site 4. Sewage canal at fruit market.

The chemical characteristics of the sewage water were analyzed and presented in figures 1 to 12. p^H is the measure of the intensity of acidity or alkalinity and measure the concentration of hydrogen ions in water, No significance fluctuations were recorded in the p^H levels which varied from 6.4 to 7.4. The alkalinity of many surface water is primarily a function of carbonates, bicarbonates phosphates, silicates and other bases. Which reveals that total alkalinity fluctuated from 42 mg/L at site-4 in Monsoon season to 162 mg/L at site-2 in winter season the highest alkalinity content was recorded in December in sewage canal near Site 4. Chloride ion is one of the major inorganic anions in water and waste water. Its pressure in large amounts is regulated as pollution. The highest chloride levels varied between 136.9 mg/L at site-4 in Monsoon season to 278.9 mg/L at site-1 in Monsoon season. In sewage canals in site. Dissolved oxygen is one of the important and critical characteristics in water quality assignment. Its presence is essential to maintain the higher form of biological life and to keep the proper balance of various populations and thus water body healthy. The analysis of dissolved oxygen which is a key in water pollution and waste treatment process showed its highest content 9.6 mg/L at site-2 in Monsoon season in August. In the sewage canal near







Site-4 and least content 7.6 mg/L in Monsoon season was noted in August in sewage canal near Site-1. The determinant of relative oxygen requirements of waste water, effluents and polluted water. The biological oxygen demand is an empirical test to determine the relative oxygen requirements of waste water and effluents. Thus measures the required for biochemical degradation of organic material and oxygen use to oxidize organic materials. In the biological oxygen demand was analyzed and showed its variations from 12 mg/L sewage canal near Site-3 in August to 182 mg/L (sewage canal near Site-3 in April) the oxygen equivalent of organic matter content of samples that is susceptible to oxidation by a strong chemical oxidant. Chemical oxygen demand is the oxygen equivalent of the organic matter content of sample that is susceptible to oxidation by a strong chemical oxidant. Chemically oxidisable organic substances of different water enter into aquatic system are responsible for changing chemical oxygen demand levels. Chemical oxygen demand has showed its range of variation from 2.8 mg/L – 112.0 mg/L the organic matter composed of a variety of organic compounds of various oxidation states showed its fluctuations from 0.01 to 0.253 % specifically with site differentiation. Large amount free carbon dioxide was recorded in the month of April.


2.42 mg/L and in the remaining months the free carbon dioxide range was moderate, which was between 9.5 mg/L. The Percentage of organic matter composed of a variety of organic compounds of various oxidation states was showed its fluctuations from 0.012% - 0.253% specifically with site differentiation. Von Sperling et al (2002), Wasay and Jain (1988), Tripathi et al (1991) and Selvan et al (1994) also said the city sewage discharged in to nearby aquatic bodies cause a lot of disturbances and imbalances in the ecosystems. Singh *et al* (1991) analyzed the city sewage drains entering Ganga at Patna and noted the highest loads of physical and chemical pollutants. Saksera and Mishra (1991) developed a novel water quality index and self-purification capacity of sewage

collecting channel at Gwalior. Sewage has large quantities of nitrogenous matter, Thus its disposal tends to increase the ammonia content of the waters (Berrow and Webber 1972). The ammonia regulant of various microbial activities showed its broad range

with seasonal changes, which varied from 0.80 mg/L to 2.22 mg/L . Generally the ammonia content was high in the sewage water near Site-4. The nitrate and nitrite, related compounds of ammonia were shown in a peculiar presence in the present observation. Nitrate which showed its highest content 1.84mg/ml. In sewage canal flowing adjacent to Site-4 showed the absence of nitrate except in April.

CHEMICAL CHARACTERISTICS OF SEWAGE WASTE WATER IN KHAMMAM CITY in Figures

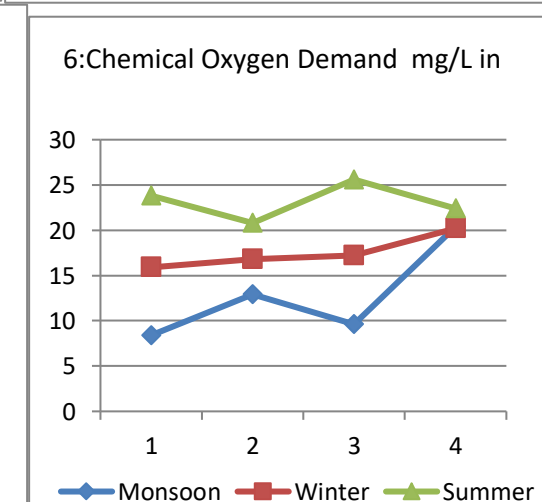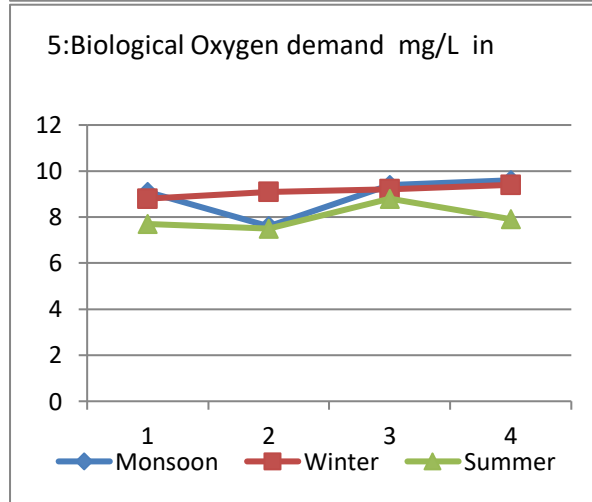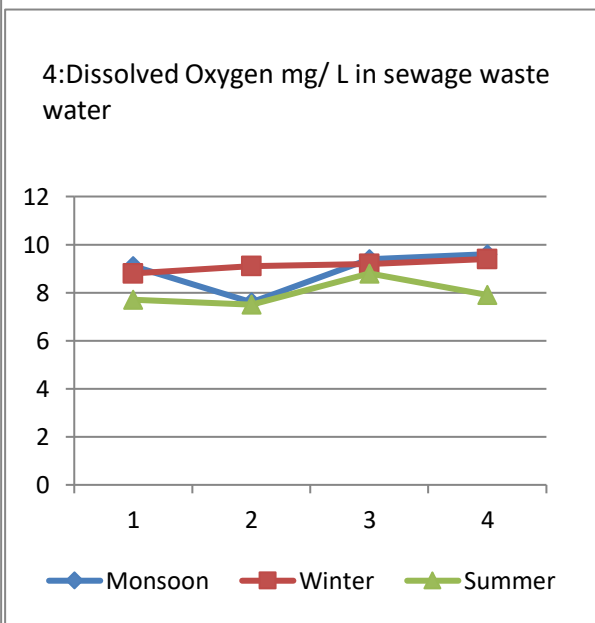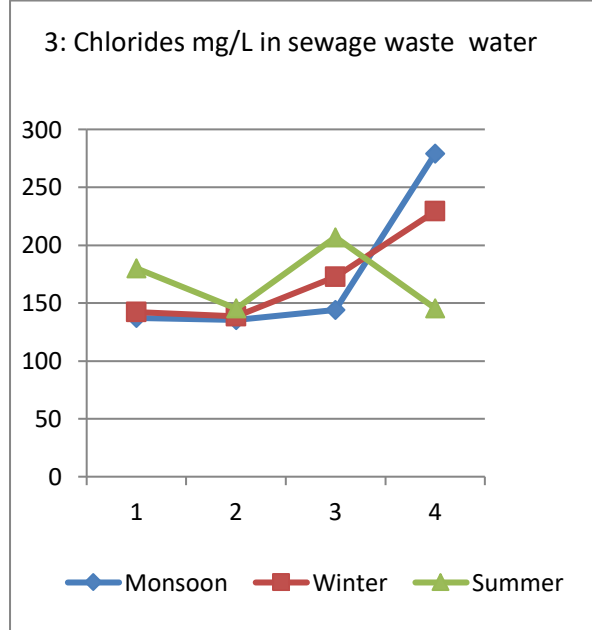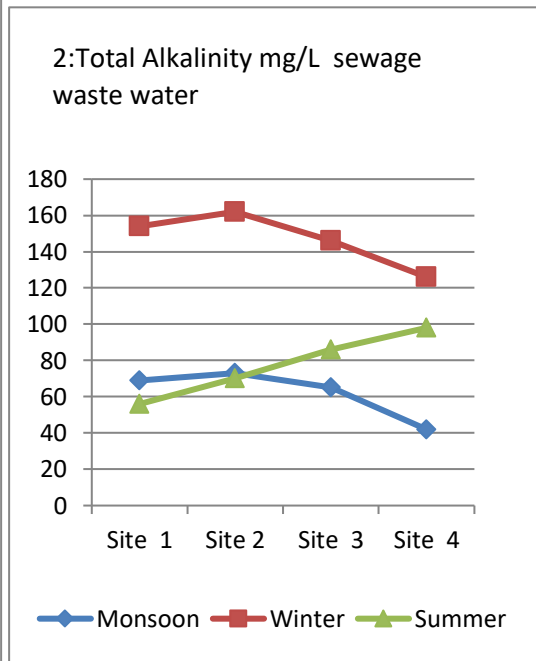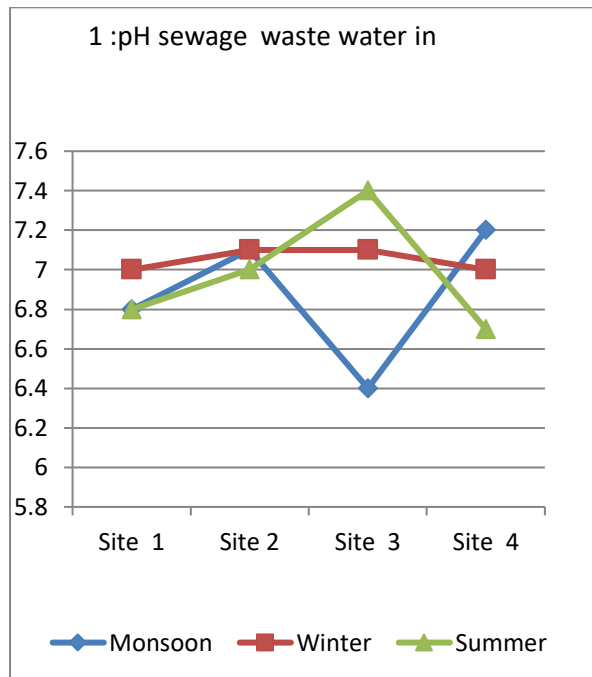

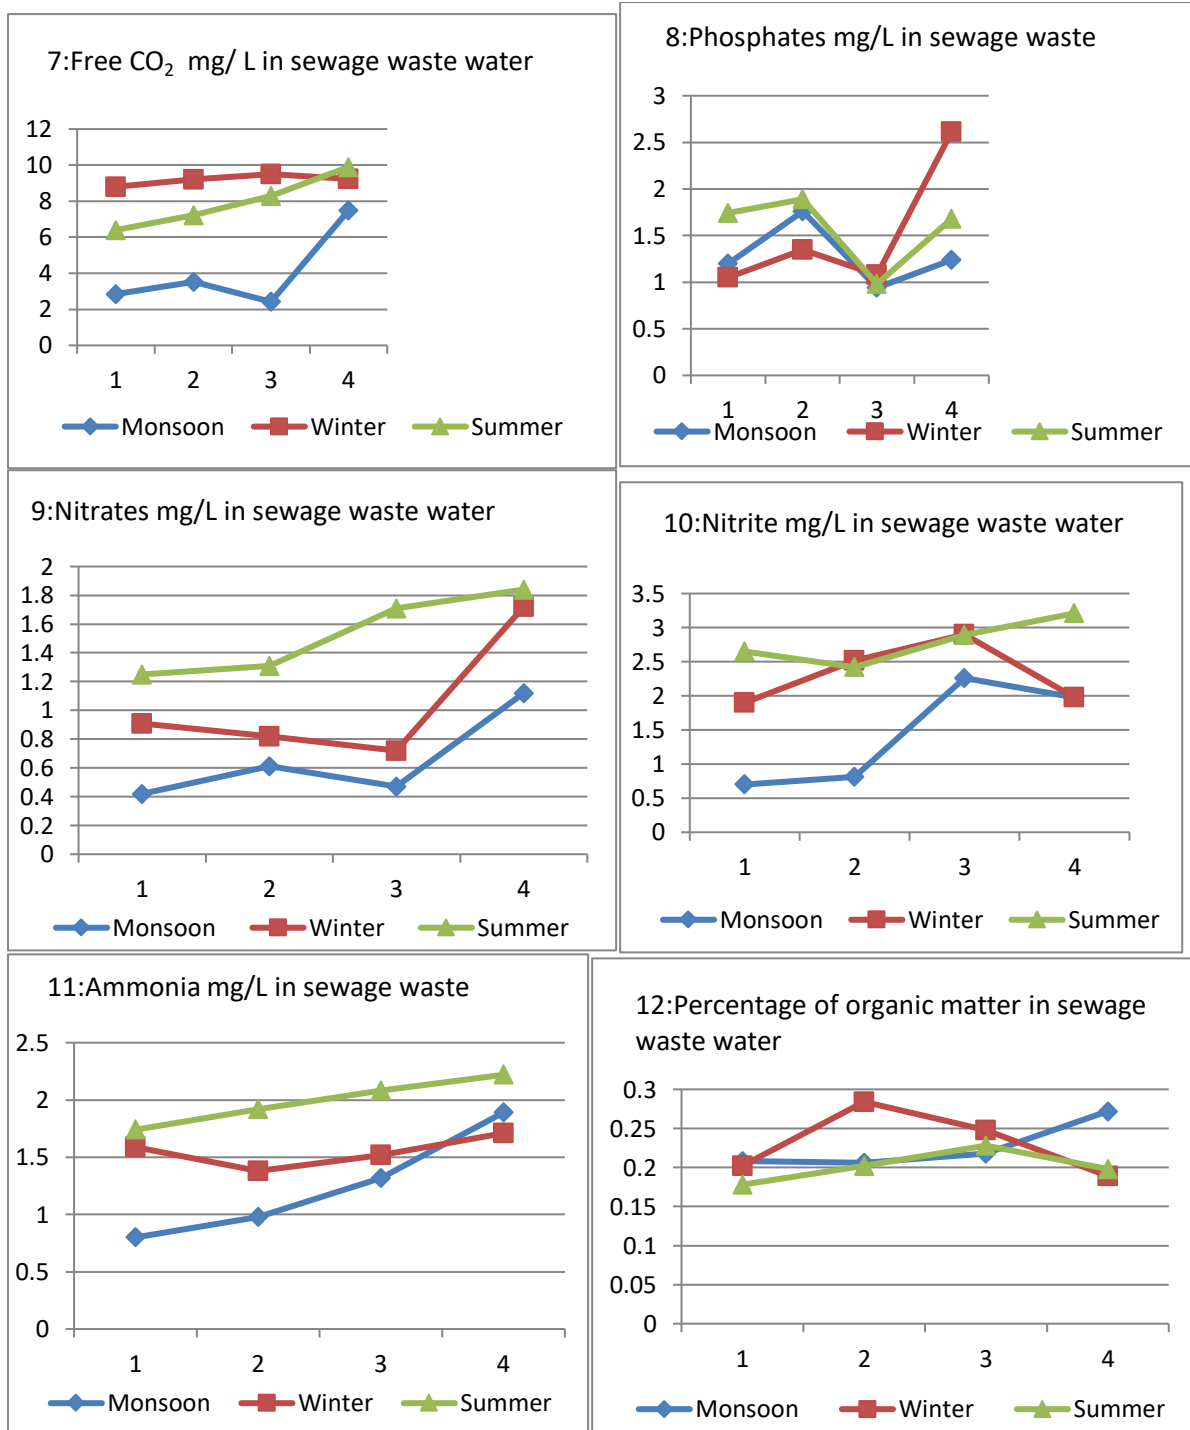

Site 1. Sewage canal at railway track.
Site 2. Sewage canal at grain market.
Site 3. Sewage canal at main highway.

Site 4. Sewage canal at fruit market.

TABLE- 3

MICROBIOLOGICAL CHARACTERISTICS OF SEWAGE WASTE WATER IN KHAMMAM CITY

S.No	CHARACTERISTICS	SEASON	SITE 1	SITE 2	SITE 3	SITE 4
1	General coliform bacteria (1×10^6)	Monsoon	28	45	26	85
		Winter	88	51	108	121
		Summer	89	101	94	76
2	Fungi (1×10^5)	Monsoon	28	39	16	22
		Winter	44	41	52	48
		Summer	24	30	36	40
3	Actinomycetes (1×10^5)	Monsoon	38	99	86	42
		Winter	84	45	68	49
		Summer	54	70	38	60

Site 1. Sewage canal at railway track

Site 2. Sewage canal at grain market

Site 3. Sewage canal at main highway.

Site 4. Sewage canal at fruit market

Microorganisms constitute an invaluable component of an ecosystem. This is a natural resource of immense value. Isolation, identification and maintenance these of microbial wealth are considered essential to understand the ever increasing problems of humans and also to find suitable cost effective solutions to them. A recent estimate of microbial diversity indicated that only 1% of naturally occurring microorganisms are known,

while the rest remains undiscovered. The microbiological examination of sewage water samples were made to determine their secretory microorganisms' the determined enumeration quantity of different microorganisms are reported in Table-3. The minimum coliform bacteria colonies were 26×10^6 at site-3 in winter season. The maximum coliform bacteria colonies were 121×10^6 at site-4 in Monsoon season. The standard association between fungal

densities and organic loading suggested that fungi are better bioindicators of pollution. The common fungal colonies were observed in four sewage canals are as follows *Aspergillus niger*, *A. flavus*, *A. fumigatus* and *Penicillium*, *Nigrospora*, *Rhizopus*, *Mucor*, *Monotropa* and *Fusarium*. The numbers of population of actinomycetes were observed. An extensive impact on environment by decomposing and transforming a wide variety of complex organic residues they constitute the proportion of population in sewage canals which ranged from 16×10^6 at site-3 in Monsoon season to 52×10^6 at site-3 in winter season between 84×10^5 . Chitra and Vittal (1989) and Khulbe and Durgapal (1994) estimated the densities of fungal and bacterial population with raw and treated sewage in various oxidation ponds and lagoons. Goutham et al (1989) studied different sewage canals signified their role in managing and maintaining the microbial population. Chona (1990) also prepared a status report on the variation in microbial quality of sewage at Chandigarh.

References:

- APHA, AWWA, WPCF, 1998. Standard Methods for the Examination of Water and Wastewater. American Public Health Association, Washington D.C., USA.
- Balwinder Singh, S.P.S. Bar and S.R. Bishons (1989). Quality of sewage waters of Punjab. Indian J. environ. Health, 31:262-266.
- Berrow, M.C. and J. Webber (1972). Trace elements in sewage waters. J.Sci. Forv. Agric., 23:93-100.
- Chona M.K 1990 Preliminary study in variation in quality of sewage at Chandigarh. Himalayan Envi Zoo, 4; 55-57.
- Chitra and Vittal 1989.
- Chitra.R and B.P.R Vittal 1989 Fungi associated with raw and treated sewage in oxidation ponds and aerated lagoons, Indian Environ 31:363-366.
- Gautham, A, N.Singh and C.P. Juyal 1989 Chemical parameters and role of sewage as pollutant in river Bhagirathi at Uttarkashi (Garhwal Himalayas). J.Env.Zoo., 3:262-264.
- Gupta.B and S.Kumar 1991 self-purification of flowing sewage water of Aligarh polln.res. 10:209-213.
- Khulbe R.D and A.Durgapal 1994 sewage mycoflora in relation to pollutants in Nainital, Kumaun Himalaya, pollu.Res 13:53-58.
- Manian.s., Udaiyan and N.Subramanian 1991 Effect of municipal sewage on the bacteriological quality of the river Kaveri, Tamilnadu, Acta Botanica, Indica 19:162-167.
- Pandya.G., U.Tuteja, A.M. Jam and K.M.Rao 1992 Prevalence of enteroviruses in the sewage samples of Gwalior, Indian J.Environ. Hlth.34; 15-19.
- Selvan.V, V.Hariprasad., R.Mohan and Ramasubramanian 1994. Diurnal variations in the water quality of sewage polluted Adyar Mangrove water east coast of India.
- Singh, K.R., B.K.Mishra and G.Singh 1991 Water quality sewage drains entering Ganga at Patna. J.Mendel: 8:65-68

Sivakumar A A. Rajasree P V
2016 Efficiency of water hyacinth in the
removal of nutrients from polluted water of
Coimbatore. J Aquacult Trop, 31(1-2, 85-
9).

Von Sperling. M.,
Chernicharo.C.A.L.(2002). Urban waste
water treatment technologies and the
implementation of discharge standards in
developing countries. Urban water, 4 PP.
105-114.

Wasay ., S.A and P.K Jain 1988 Heavy
metals in raw sewage entering river
Yamuna at Delhi and their treatment by
natural poly electrolyte. J. Iustn. Bugors.
(India) enviEngng 68:81-85.